

PATENT APPLICATION

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re the Application of:

Kari PAJUKOSKI et al.

Group Art Unit: Unassigned

Application No.: New Application

Examiner: Unassigned

Filed: January 21, 2004

Attorney Dkt. No.: 60091.00268

For: COMMUNICATION METHOD, RECEIVER AND BASE STATION

CLAIM FOR PRIORITY UNDER 35 USC § 119

Commissioner for Patents
P.O. Box 1450
Alexandria, VA 22313-1450

January 21, 2004

Sir:

The benefit of the filing date of the following prior foreign application filed in the following foreign country is hereby requested for the above-identified patent application and the priority provided in 35 U.S.C. §119 is hereby claimed:


Patent Application No. 20031609 filed on November 16, 2003 in Finland

In support of this claim, certified copy of said original foreign application is filed herewith.

It is requested that the file of this application be marked to indicate that the requirements of 35 U.S.C. §119 have been fulfilled and that the Patent and Trademark Office kindly acknowledge receipt of this document.

Please charge any fee deficiency or credit any overpayment with respect to this paper to Counsel's Deposit Account No. 50-2222.

Respectfully submitted,



Douglas H. Goldhush
Registration No. 33,125

Customer No. 32294
SQUIRE, SANDERS & DEMPSEY LLP
14TH Floor
8000 Towers Crescent Drive
Tysons Corner, Virginia 22182-2700
Telephone: 703-720-7800
Fax: 703-720-7802

DHG:cct

Enclosure: Priority Document (1)

PATENTTI- JA REKISTERIHALLITUS
NATIONAL BOARD OF PATENTS AND REGISTRATION

Helsinki 19.11.2003

ETUOIKEUSTODISTUS
PRIORITY DOCUMENT



Hakija
Applicant

Nokia Corporation
Helsinki

Patenttihakemus nro
Patent application no

20031609

Tekemispäivä
Filing date

06.11.2003

Kansainvälinen luokka
International class

H04B

Keksinnön nimitys
Title of invention

"Communication method, receiver and base station"
(Viestintämenetelmä, vastaanotin ja tukiasema)

Täten todistetaan, että oheiset asiakirjat ovat tarkkoja jäljennöksiä Patentti- ja rekisterihallitukselle alkuaan annetuista selityksestä, patenttivaatimuksista, tiivistelmästä ja piirustuksista.

This is to certify that the annexed documents are true copies of the description, claims, abstract and drawings originally filed with the Finnish Patent Office.


Pirjo Kaila
Tutkimussihteeri

Maksu 50 €
Fee 50 EUR

Maksu perustuu kauppa- ja teollisuusministeriön antamaan asetukseen 1027/2001 Patentti- ja rekisterihallituksen maksullisista suoritteista muutoksineen.

The fee is based on the Decree with amendments of the Ministry of Trade and Industry No. 1027/2001 concerning the chargeable services of the National Board of Patents and Registration of Finland.

Osoite:	Arkadiankatu 6 A	Puhelin:	09 6939 500	Telefax:	09 6939 5328
	P.O.Box 1160	Telephone:	+ 358 9 6939 500	Telefax:	+ 358 9 6939 5328
	FIN-00101 Helsinki, FINLAND				

Communication Method, Receiver and Base Station

Field

The invention relates to a method for reducing the influence of interference in a multi-user receiver, when the multi-user receiver receives signals from users having different data rates using at least two antenna elements. The invention also relates to a multi-user receiver and a base station.

Background

Several combining techniques have usually been used to combine diversity antennas or different antenna branches in antenna arrays to create nulls towards interfering signals while maintaining a large antenna gain towards the desired signal, thus reducing interference. One example of combining techniques is interference rejection combining (IRC). Conventionally the IRC is carried out at symbol level after despreading operations. This requires that the IRC operations need to be implemented separately for each user, thus increasing the complexity of a receiver. For simplifying the receiver structure, the IRC technique is combined with a maximal ratio combining (MRC) technique, whereupon an IRC filter acts as a pre-whitening filter in WO 02/075950. The IRC technique is also examined in Esa Tirola, Juha Ylitalo: Performance of Smart Antenna Receivers in WCDMA Uplink with Spatially Coloured Interference, IST Mobile Communications Summit 2001, Barcelona, Spain, 9. - 12.9.2001, which is incorporated herein by reference. While the IRC technique is used in a pre-whitening filter, the pre-whitening is carried out by antenna weighting, which is performed on all users. Thus there arises a problem: the high bit rate users are seen as relatively high level interferers to low bit rate users and therefore taken into account when determining whitening weights. As a consequence of this, in whitening, the combining of antenna signals is not optimal from the high data rate user's point of view. The use of a non-optimal solution will diminish the uplink coverage of high data rate users and at the same time increase the user terminal's battery consumption for the high bit rate users.

Brief description of the invention

The invention provides an improved method, receiver and base station.

According to an embodiment, there is provided a method for reducing the influence of interference in a multi-user receiver, when the multi-user receiver receives signals from users having different data rates using at least two antenna elements, the method comprises: creating a spatial covariance matrix estimate from wideband antenna signals by sampling, arranging sampled values into a signal vector and by multiplying the signal vector by its conjugate transpose vector, determining a whitening filter on the basis of the spatial covariance matrix estimate, whitening received signals by using the whitening filter, removing the whitening from signals of predetermined users by using an inverse matrix of the matrix used in the whitening filter, conveying whitened signals and the signals from which the whitening has been removed to a receiver element, which carries out multi-path combining and multi-antenna combining.

According to another embodiment, there is provided a multi-user receiver which uses at least two antenna elements and in which the influence of interference is reduced, the receiver comprises: means for pre-filtering a wideband antenna signal, the pre-filtering means being determined on the basis of a spatial covariance matrix estimate, which spatial covariance matrix estimate is obtained from wideband antenna signals by sampling, arranging sampled values into a signal vector and by multiplying the signal vector by its conjugate transpose vector, means for removing the whitening from signals of predetermined users by using an inverse matrix of the matrix used in the whitening filter, means for performing multi-path combining and multi-antenna combining.

According to another embodiment, there is provided a multi-user receiver which uses at least two antenna elements and in which the influence of interference is reduced, the receiver comprises: one branch with a whitening arrangement, another branch without a whitening arrangement and a switching arrangement conveying received signals to the branch with the whitening arrangement or to the branch without the whitening arrangement depending on the used bit rate, a receiver element performing multi-path combining and multi-antenna combining.

According to another embodiment, there is provided a multi-user receiver in which the influence of interference is reduced, comprising: a pre-filter whitening a wideband antenna signal, the pre-filter being determined on the basis of a spatial covariance matrix estimate which spatial covariance matrix estimate is obtained from wideband antenna signals by sampling, arranging

sampled values into a signal vector and by multiplying the signal vector by its conjugate transpose vector, a whitening removing arrangement removing the whitening from signals of predetermined users by using an inverse matrix of the matrix used in the whitening filter, a receiver element performing multi-path combining and multi-antenna combining.

According to another embodiment, there is provided a base station comprising a multi-user receiver which receiver uses at least two antenna elements and in which base station the influence of the interference is reduced, the base station comprises: means for pre-filtering a wideband antenna signal, the pre-filtering means being determined on the basis of a spatial covariance matrix estimate, which spatial covariance matrix estimate is obtained from wideband antenna signals by sampling, arranging sampled values into a signal vector and by multiplying the signal vector by its conjugate transpose vector, means for removing the whitening from signals of predetermined users by using an inverse matrix of the matrix used in the whitening filter, means for performing multi-path combining and multi-antenna combining.

According to another embodiment, there is provided a base station comprising a multi-user receiver which uses at least two antenna elements and in which base station the influence of the interference is reduced, the base station comprises: one branch with a whitening arrangement, another branch without a whitening arrangement and a switching arrangement conveying received signals to the branch with the whitening arrangement or to the branch without the whitening arrangement depending on the used bit rate, an element performing multi-path combining and multi-antenna combining.

According to another embodiment, there is provided a base station comprising a multi-user receiver which uses at least two antenna elements and in which base station the influence of the interference is reduced, the receiver comprises: a pre-filter whitening a wideband antenna signal, the pre-filter being determined on the basis of a spatial covariance matrix estimate, which spatial covariance matrix estimate is obtained from wideband antenna signals by sampling, arranging sampled values into a signal vector and by multiplying the signal vector by its conjugate transpose vector, a whitening removing arrangement removing the whitening from signals of predetermined users by using an inverse matrix of the matrix used in the whitening filter, an element performing multi-path combining and multi-antenna combining.

The method and system of the invention provide several advantages. In one embodiment of the invention, the whitening performed by a pre-whitening filter can be removed from predetermined users and therefore the signals can be combined optimally. In another embodiment of the invention, the predetermined users are conveyed to by-pass a pre-whitening filter, thus preventing disadvantages caused by whitening.

List of drawings

In the following, embodiments of the invention will be described in greater detail with reference to the preferred embodiments and the accompanying drawings, in which

Figure 1 shows an example of a method for reducing the influence of interference in a multi-user receiver,

Figure 2 illustrates an example of a receiver structure for reducing the influence of interference in a multi-user receiver,

Figure 3 shows an example of a receiver structure for reducing the influence of interference in a multi-user receiver.

Description of embodiments

With reference to Figure 1, let us examine an embodiment of a method for reducing the influence of interference in a multi-user receiver. The method may be used in several kinds of radio receivers, such as a base station of a communication system, for instance a base station used in a wideband code division multiple access system (WCDMA), such as UMTS (universal mobile telecommunications system). The receiver may, for example, be a Rake receiver or a receiver having diversity antennas. The embodiment is directed to a receiver having a pre-whitening filter in the front-end of an MRC receiver.

The embodiment is especially suitable for systems where there are users having different bit rates, for example, the majority of users use low bit rate services and some users use high bit rate services and the receiver uses several antenna elements. Data rates, which are classified as low or high, vary according to the current system; the data rates tend to increase due to technology development. In this application, the concept of high bit rate users means users having a relatively high bit rate and low bit rate users mean users having a relatively low bit rate. It is possible to set a bit rate threshold and classify users exceeding it as high bit rate users.

The embodiment starts in block 100. In block 102, a covariance matrix estimate is created from wideband antenna signals by sampling, arranging sampled values into a signal vector and by multiplying the signal vector by its conjugate transpose vector. The signals received by different antennas are preferably sampled simultaneously, for which reason sampled values are arranged into a vector format. The size of the vector depends on the number of antennas. Several sampling methods are known in the art and therefore they are not explained here in further detail.

The wideband antenna signal vector representing the desired signal of a single user, related interference and noise can be defined as

$$\mathbf{x}_i(j) = \sum_l \mathbf{h}_l y_l(j - \tau_l) + \mathbf{u}_i(j) \quad (1)$$

wherein

\mathbf{h} is a channel model as a tapped delay line with an impulse response $\sum_l \mathbf{h}_l \delta(j - \tau_l)$

\mathbf{u}_i is a vector including interference and noise components of signal samples,

y_l is a complex-valued transmitted signal,

i is a time slot index,

j is a chip index,

δ means the Dirac's delta function,

τ means a relative delay of a multi-path component,

\sum means summing.

The signal spatial covariance matrix is then calculated by multiplying the signal vector (1) by its conjugate transpose (Hermitian) vector $\mathbf{x}_i(j)^H$.

The spatial covariance estimate matrix is typically averaged over a selected period of time, for instance, the averaging length can be chosen to be a time slot or a fraction of it.

The spatial covariance estimate matrix averaged over a time slot having 2560 chips can be expressed as follows

$$\hat{\mathbf{R}}_{\mathbf{x},i} = \frac{1}{2560} \sum_{j=1}^{2560} \mathbf{x}_i(j) \mathbf{x}_i(j)^H \quad (2)$$

wherein

\mathbf{x}_i is a wideband antenna signal matrix,

i is a time slot index,

j is a chip index.

\sum means summing.

In block 104, a whitening filter is determined on the basis of the covariance matrix estimate. The whitening filter is typically implemented by using a whitening filter matrix. The whitening filter matrix may be obtained in such a way that it satisfies

$$\mathbf{W}_l \mathbf{W}_l^H = \hat{\mathbf{R}}_{xx,l}^{-1} \quad (3)$$

wherein

$\hat{\mathbf{R}}_{xx,l}$ is a covariance matrix estimate,

\mathbf{W}_l is a whitening filter matrix,

\mathbf{W}_l^H is a complex-conjugate (Hermitian) matrix of the whitening filter matrix,

$^{-1}$ denotes inversion.

The whitening filter matrix can be solved by using Cholesky decomposition, because matrix $\hat{\mathbf{R}}_{xx,l}$ is a symmetric and positive definite matrix. The Cholesky decomposition of the spatial covariance matrix estimate $\hat{\mathbf{R}}_{xx,l}$ may be written as

$$\hat{\mathbf{R}}_{xx,l} = \mathbf{U}^H \mathbf{U} \quad (4)$$

wherein

\mathbf{U} is an upper triangular matrix.

If the filter \mathbf{W} is chosen as the inverse of the Cholesky factor, i.e.,

$$\mathbf{U} \mathbf{W} = \mathbf{I}_m \quad (5)$$

wherein

\mathbf{I}_m is an identity matrix of size m , then it follows that the equation (3) is satisfied.

In block 106, received signals are whitened by using the whitening filter. The whitening may be carried out by a complex matrix multiplication.

The purpose of whitening is to whiten coloured noise or interference, which means that the powers of interfering signals are transformed by filtering to be similar to that of white Gaussian noise. The whitening adjusts signals for the MRC (maximal ratio combining) because the MRC performance

is optimal in case that noise or interference is spatially white Gaussian. The assumption of spatially white Gaussian noise is valid for the interference scenario with a large number of low bit rate users. When there are also high bit rate users, the interference is coloured, in other words the interference is not uncorrelated between different antennas. Whitened received signals (received chips) obtained by matrix multiplication may be written as

$$\mathbf{x}_{w,i}(j) = \mathbf{W}_i \mathbf{x}_i(j) \quad (6)$$

wherein

\mathbf{W}_i is a whitening filter matrix,

\mathbf{x}_i is a wideband antenna signal matrix,

i is a time slot index,

j is a chip index.

In block 108, the whitening is removed from signals of predetermined users by using an inverse matrix of the matrix used in the whitening filter. Removing is typically carried out by matrix multiplication. The removing may be carried out in different places in a reception chain: if the whitening is removed from channel estimates, the channel impulse response matrix is multiplied by the inverse matrix of the whitening matrix, or if the whitening is removed from despread data, the despread data arranged in a matrix format is multiplied by the inverse matrix of the whitening matrix, for example. The whitening is removed from predetermined signals, which in practice can be implemented, for instance, by using a bit rate threshold: the whitening is removed from signals exceeding the threshold.

In practice, the whitening is preferably carried out before a prior art MRC (maximal ratio combining) receiver. The removing of the whitening may also be carried out before the MRC receiver or it may be incorporated in it. The principle of the MRC is that different phase offsets of each received signal are estimated and compensated for after demodulation, the power level of each received signal is estimated and the phase-corrected demodulator outputs are weighted in direct proportion of the received signal strength, the phase-corrected and weighted signals are summed and fed to the detector. The MRC technique is known in the art and is therefore not explained here in greater detail.

In block 110, whitened signals and the signals from which the whitening has been removed are conveyed to a receiver element, which carries out

multi-path combining and multi-antenna combining. The element performing multi-path combining and multi-antenna combining may be a maximum ratio combiner. In one embodiment, the multi-path combining and the multi-antenna combining are carried out according to the Rake principle. Arrow 116 depicts
 5 that both whitened signals and signals from which the whitening has been removed are conveyed to the multi-path combining and multi-antenna combining.

The embodiment ends in block 112. Arrow 114 depicts one possibility for repeating the embodiment. A generalised example of a part of a receiver depicted by Figure 2 is now examined. It is obvious to a person skilled in the
 10 art that the receiver may also include elements other than those illustrated in Figure 2. The receiver may be located in several kinds of communication units, such as a base station of a communication system, for instance a base station used in a wideband code division multiple access system (WCDMA), such as UMTS (universal mobile telecommunications system). The receiver may, for
 15 example, be a Rake receiver.

The receiver includes an antenna array or diversity antennas 212, 214. The number of antennas may vary according to the implementation. The IRC block 200 is a pre-whitening filter carrying out whitening operation. The pre-whitening filter is determined on the basis of a spatial covariance matrix
 20 estimate, which is obtained from the sampled antenna signals. The pre-whitening filter determination is explained above with the aid of the embodiment depicted in Figure 1.

The MRC receiver structure 216 includes in this embodiment one receiver element 202, 204, 206, 208, 210 per each user. Some of them 202,
 25 204, 206, 208 are for low bit rate users and one 210 for a high bit rate user. The number of MRC receiver elements may vary according to the implementation. In this embodiment, the MRC receiver elements use the Rake principle for multi-path combining and multi-antenna combining.

Low bit rate users are conveyed to their MRC receiver elements for
 30 MRC processing. The MRC process includes estimation and compensation for phase offsets of each received signal after demodulation, power level estimation of each received signal, weighting of phase-corrected demodulator outputs in direct proportion of the received signal strength and summation of the phase-corrected and weighted signals. The output of each MRC receiver element
 35 is then conveyed to the detector 220. The MRC technique is known in the art and is therefore not explained here in greater detail.

The predetermined user, typically a high bit rate user, is conveyed to its MRC element, where the whitening carried out by a pre-whitening filter 200 is removed by using an inverse matrix W_i^{-1} of the matrix used in the whitening filter. Removing is typically carried out by matrix multiplication. The removing may be carried out in different points of a transmission chain: if the whitening is removed from channel estimates, the estimate channel impulse response matrix is multiplied by the inverse matrix of the whitening matrix, or if the whitening is removed from despread data, the despread data arranged in a matrix format is multiplied by the inverse matrix of the whitening matrix, for example. The whitening is removed from predetermined signals, which in practice can be implemented, for instance, by using a bit rate threshold: the whitening is removed from signals exceeding the threshold. The removing may also be carried out in a separate removing block in the front end of a MRC receiver or receiver element.

The control block 218 controls the function of the MRC receiver and also the removing of whitening. The whitening and the removing of whitening are typically implemented according to the present embodiment as a processor and software, but different hardware implementations are also feasible, e.g. a circuit built of separate logic components or one or more client-specific integrated circuits (Application-Specific Integrated Circuit, ASIC). A hybrid of these implementations is also feasible.

Next another generalised example of a part of a receiver is examined with the aid of Figure 3. The receiver of this embodiment includes one branch with a whitening procedure and another branch without a whitening procedure. Received signals are conveyed to the branch with the whitening procedure or to the branch without the whitening procedure depending on the used bit rate.

It is obvious to a person skilled in the art that the receiver may also include elements other than illustrated in Figure 3. The receiver may be located in several kinds of communication units, such as a base station of a communication system, for instance a base station used in a wideband code division multiple access system (WCDMA), such as UMTS (universal mobile telecommunications system). The receiver may, for example, be a Rake receiver.

The receiver includes an antenna array or diversity antennas 312, 314. The number of antennas may vary according to the implementation. The

IRC block 300 is a pre-whitening filter carrying out whitening operation. The pre-whitening filter is determined on the basis of a spatial covariance matrix estimate, which is obtained from the sampled antenna signals. The pre-whitening filter determination is explained above with the aid of the embodiment depicted in Figure 1.

The receiver also includes logical MRC receivers 302, 304, 306, 308 for low bit rate users and one 310 for a high bit rate user. There are available two connections per antenna: one 322A, 324A for wideband antenna signal passing the pre-whitening filter (IRC block) 300 and another one 322B, 324B which conveys signals to the pre-whitening filter. There is also a switching block 318 which switches low bit rate users to their MRC receivers 302, 304, 306, 308 and a high bit rate user to its MRC receiver 310. In this embodiment, the MRC receiver elements use the Rake principle for multi-path combining and multi-antenna combining. The MRC process includes estimation and compensation for phase offsets of each received signal after demodulation, power level estimation of each received signal, weighting of phase-corrected demodulator outputs in direct proportion of the received signal strength and summation of the phase-corrected and weighted signals. The output of each MRC receiver element is then conveyed to the detector 320. The MRC technique is known in the art and is therefore not explained here in greater detail.

The control block 316 controls the function of the switching block 318 according to the user's bit rate conveying the high bit rate users to by-pass the pre-whitening filter 300. The switching is typically implemented as a hardware implementation.

Even though the invention is described above with reference to an example according to the accompanying drawings, it is clear that the invention is not restricted thereto but it can be modified in several ways within the scope of the appended claims.

Claim

1. A method for reducing the influence of interference in a multi-user receiver, when the multi-user receiver receives signals from users having different data rates using at least two antenna elements, characterized in that the method comprises:

- (102) creating a spatial covariance matrix estimate from wideband antenna signals by sampling, arranging sampled values into a signal vector and by multiplying the signal vector by its conjugate transpose vector,
- (104) determining a whitening filter on the basis of the spatial covariance matrix estimate,
- (106) whitening received signals by using the whitening filter,
- (108) removing the whitening from signals of predetermined users by using an inverse matrix of the matrix used in the whitening filter,
- (110) conveying whitened signals and the signals from which the whitening has been removed to a receiver element, which carries out multi-path combining and multi-antenna combining.

2. The method of claim 1, characterized in that the whitening is carried out by matrix vector multiplication.

3. The method of claim 1, characterized in that the receiver uses maximum ratio combining for performing multi-path and multi-antenna combining according to the Rake principle.

4. The method of claim 1, characterized in that the whitening filter is determined by using Cholesky decomposition.

5. The method of claim 1, characterized in that the users from whom the whitening is removed are determined on the basis of a bit rate threshold.

6. A multi-user receiver which uses at least two antenna elements and in which the influence of interference is reduced, characterized in that the receiver comprises:

- means (200) for pre-filtering a wideband antenna signal, the pre-filtering means being determined on the basis of a spatial covariance matrix estimate, which spatial covariance matrix estimate is obtained from wideband antenna signals by sampling, arranging sampled values into a signal vector and by multiplying the signal vector by its conjugate transpose vector,

means (210, 218) for removing the whitening from signals of predetermined users by using an inverse matrix of the matrix used in the whitening filter,

means (202, 204, 206, 208, 210) for performing multi-path combining and multi-antenna combining.

7. A multi-user receiver which uses at least two antenna elements and in which the influence of interference is reduced, characterized in that the receiver comprises:

one branch (322B, 324B) with a whitening arrangement (300), another branch (322A, 324A) without a whitening arrangement and a switching arrangement (318) conveying received signals to the branch with the whitening arrangement or to the branch without the whitening arrangement depending on the used bit rate,

a receiver element (302, 304, 306, 308, 310) performing multi-path combining and multi-antenna combining.

8. A multi-user receiver in which the influence of interference is reduced, comprising:

a pre-filter (200) whitening a wideband antenna signal, the pre-filter being determined on the basis of a spatial covariance matrix estimate which spatial covariance matrix estimate is obtained from wideband antenna signals by sampling, arranging sampled values into a signal vector and by multiplying the signal vector by its conjugate transpose vector,

a whitening removing arrangement (210, 218) removing the whitening from signals of predetermined users by using an inverse matrix of the matrix used in the whitening filter,

a receiver element (202, 204, 206, 208, 210) performing multi-path combining and multi-antenna combining.

9. The receiver of claim 6, characterized in that the whitening is carried out by complex matrix multiplication.

10. The receiver of claim 7, characterized in that the whitening is carried out in the whitening arrangement (300) by complex matrix multiplication.

11. The receiver of claim 7, characterized in that the receiver element (202, 204, 206, 208, 210, 302, 304, 306, 308, 310) performing the multi-path combining and the multi-antenna combining is a maximum ratio combiner.

12. The receiver of claim 8, characterized in that the receiver element (202, 204, 206, 208, 210, 302, 304, 306, 308, 310) performing the multi-path combining and the multi-antenna combining is a maximum ratio combiner.

5 13. The receiver of claim 6, characterized in that the means (202, 204, 206, 208, 210) for performing the multi-path combining and the multi-antenna combining is a maximum ratio combiner.

14. The receiver of claim 6, characterized in that the receiver further comprises means (218, 316) for determining the users from whom the
10 whitening is removed on the basis of a bit rate threshold.

15. The receiver of claim 7, characterized in that the receiver further comprises means (218, 316) for determining the users from whom the whitening is removed on the basis of a bit rate threshold.

16. The receiver of claim 8, characterized in that the receiver
15 further comprises means (218, 316) for determining the users from whom the whitening is removed on the basis of a bit rate threshold.

17. A base station comprising a multi-user receiver which receiver uses at least two antenna elements and in which base station the influence of the interference is reduced, characterized in that the base station com-
20 prises:

means (200) for pre-filtering a wideband antenna signal, the pre-filtering means being determined on the basis of a spatial covariance matrix estimate, which spatial covariance matrix estimate is obtained from wideband antenna signals by sampling, arranging sampled values into a signal vector
25 and by multiplying the signal vector by its conjugate transpose vector,

means (210, 218) for removing the whitening from signals of predetermined users by using an inverse matrix of the matrix used in the whitening filter,

30 means (202, 204, 206, 208, 210) for performing multi-path combining and multi-antenna combining.

18. A base station comprising a multi-user receiver which uses at least two antenna elements and in which base station the influence of the interference is reduced, characterized in that the base station comprises:

35 one branch (322B, 324B) with a whitening arrangement (300), another branch (322A, 324A) without a whitening arrangement and a switching arrangement (318) conveying received signals to the branch with the whitening

arrangement or to the branch without the whitening arrangement depending on the used bit rate,



an element (302, 304, 306, 308, 310) performing multi-path combining and multi-antenna combining.

- 5 19. A base station comprising a multi-user receiver which uses at least two antenna elements and in which base station the influence of the interference is reduced, characterized in that the receiver comprises:

a pre-filter (200) whitening a wideband antenna signal, the pre-filter being determined on the basis of a spatial covariance matrix estimate, which
10 spatial covariance matrix estimate is obtained from wideband antenna signals by sampling, arranging sampled values into a signal vector and by multiplying the signal vector by its conjugate transpose vector,

a whitening removing arrangement (210, 218) removing the whitening from signals of predetermined users by using an inverse matrix of the matrix used in the whitening filter,
15



an element (202, 204, 206, 208, 210) performing multi-path combining and multi-antenna combining.



(57) Abstract

A multi-user receiver which uses at least two antenna elements and in which the influence of interference is reduced, the receiver comprises: means (200) for pre-filtering a wideband antenna signal, the pre-filtering means being determined on the basis of a spatial covariance matrix estimate, which spatial covariance matrix estimate is obtained from wideband antenna signals by sampling, arranging sampled values into a signal vector and by multiplying the signal vector by its conjugate transpose vector, means (210, 218) for removing the whitening from signals of predetermined users by using an inverse matrix of the matrix used in the whitening filter, means (202, 204, 206, 208, 210) for performing multi-path combining and multi-antenna combining.

(Figure 2)



LS
1/2

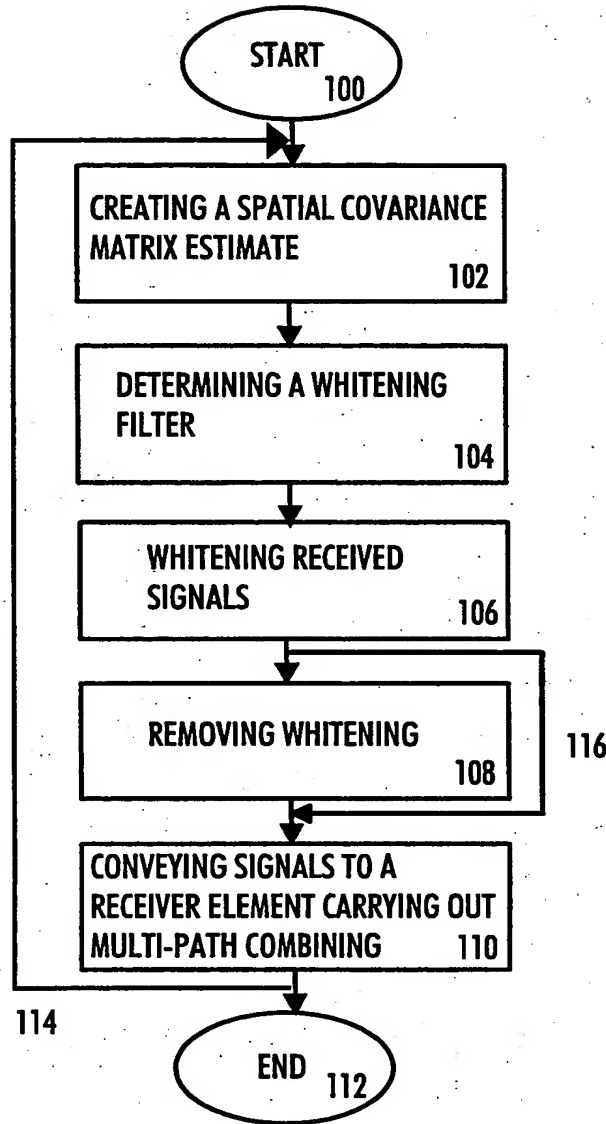


Fig. 1

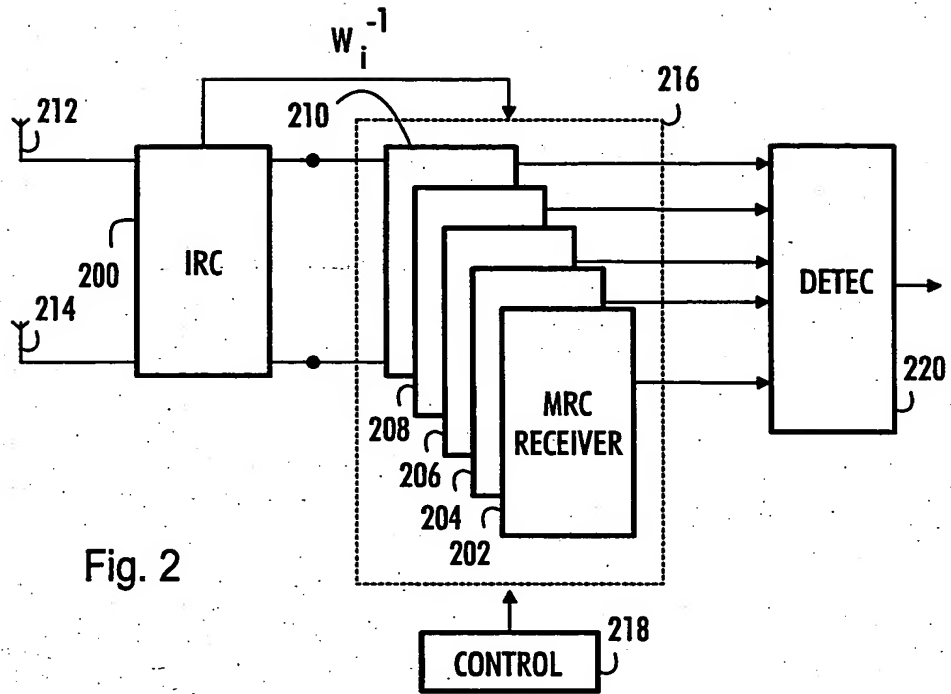


Fig. 2

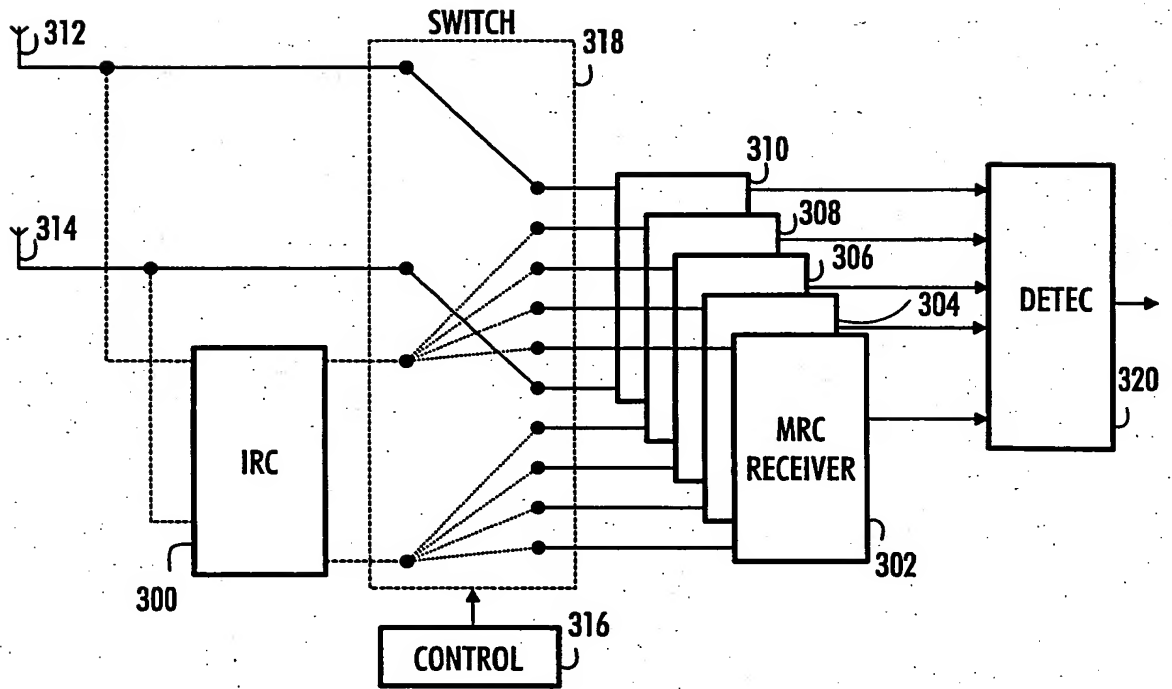


Fig. 3